


LED MECHANICAL ROTATING SCREEN

Standards



Product Overview

Explore a new dimension of visual presentation - our LED mechanical rotating screen standard products, with their innovative design and excellent performance, bring unparalleled visual impact to your advertisements, exhibitions and performances. Combining high-resolution LED display technology and intelligent rotating mechanism, these 4 products provide unique display solutions for modern commercial and entertainment environments.

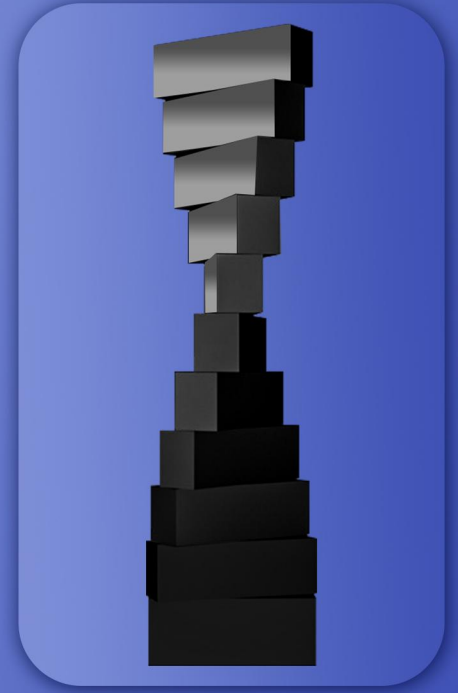

Rotating screen features

Leading a new trend in visual display




High-resolution display




360 degree rotation function



High-quality materials



Intelligent control system




Applicable in multiple scenarios



Energy-saving design

Intelligent control system

Support remote control and operation

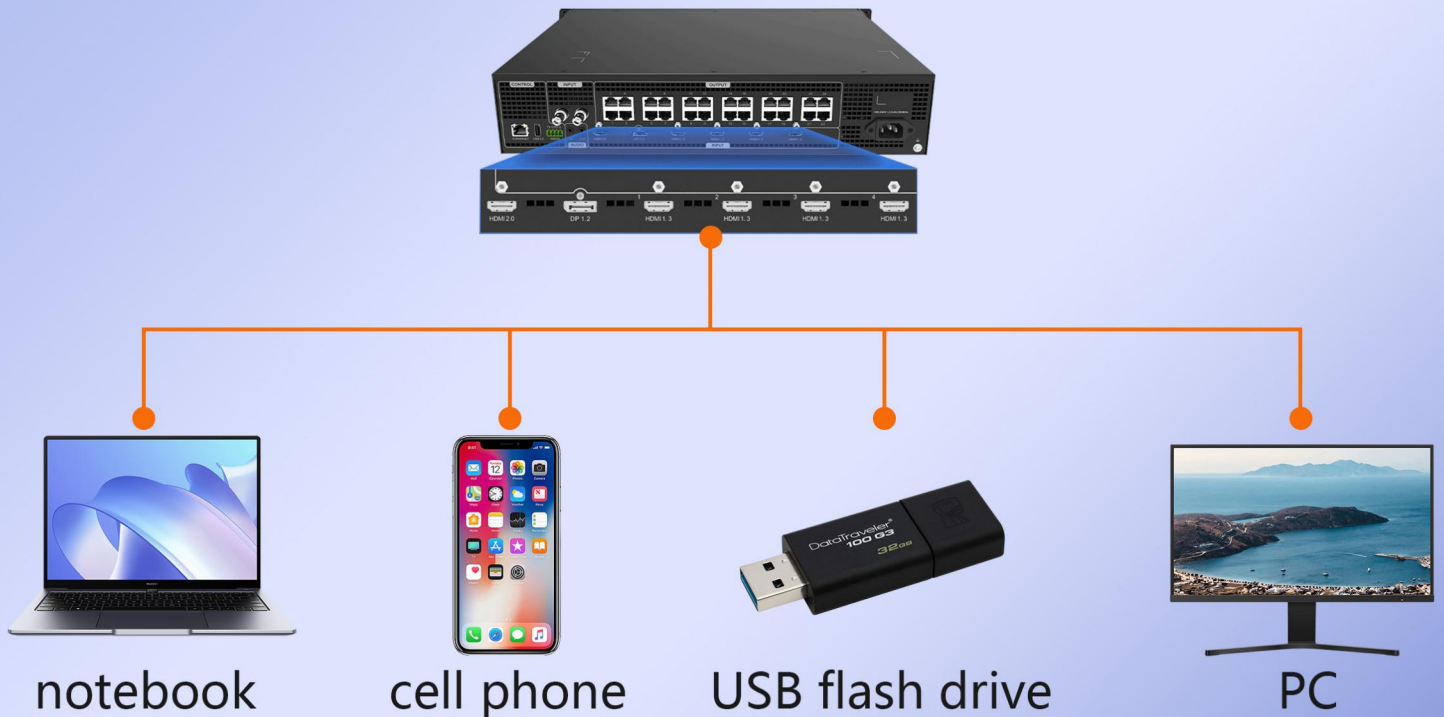

LED mechanical screen: dynamic charm beyond static

It is no longer a static plane, but a dynamic picture full of vitality and surprises.



Product Parameters



LED double-sided rotating screen

Product Model	P2.5/P2/P1.8/P1.5/P1.2
Product size	640mm*1440mm
Application Environment	Indoor/Outdoor
Screen brightness	800-1000cd/m ²
Refresh rate	≥3840Hz
Input voltage	AC110-240V,50-60Hz
Service life	100,000 hours
Base	640mm*400mm

LED ten-layer double-sided rotating screen

Product Model	P2.5/P1.9/P1.5
Mechanical Module	750mm*250mm
Application Environment	Indoor/Outdoor
Screen brightness	800-1000cd/m ²
Refresh rate	≥3840Hz
Input voltage	AC110-240V,50-60Hz
Service life	100,000 hours
Base	750mm*300mm



(One side is a mirror and the other side is a screen)



LED three-layer three-sided rotating screen	
Flexible module product model	P2.5/P2/P1.8/P1.5/P1.2
Rotating Prisms	960mm*480mm
top	960mm*160mm
Base	960mm*680mm
Application Environment	Indoor/Outdoor
Screen brightness	800-1000cd/m ²
Refresh rate	≥3840Hz
Input voltage	AC110-240V,50-60Hz
Service life	100,000 hours

LED five-layer four-sided rotating screen	
Product Model	P2.5/P1.9/P1.5
Rotating Prisms	500mm*500mm
Application Environment	Indoor/Outdoor
Screen brightness	800-1000cd/m ²
Refresh rate	≥3840Hz
Input voltage	AC110-240V,50-60Hz
Service life	100,000 hours
Base	500mm*300mm



Wide range of application scenarios

Widely used in commercial advertising, exhibitions, performances, public information releases, etc.



/
NO.1

Commercials



/
NO.2

Exhibition



/
NO.3

Performances

Quality assurance, worry-free transportation



Case Showcase

